
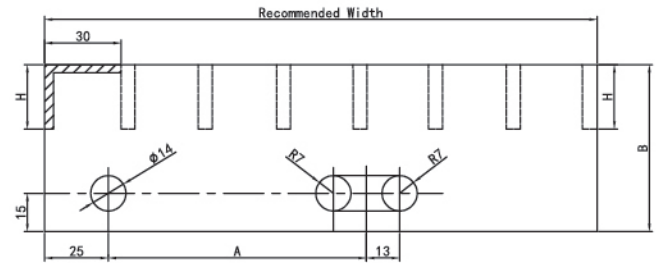



Typical Tread Design


TREADS

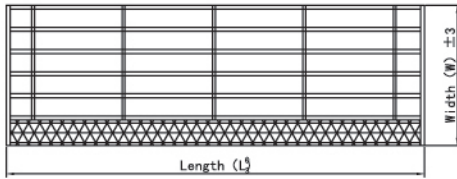

Steel Treads				
Bearing Bar Size	Maximum Tread Length			
	@30o.c.		@40o.c.	
	Plain	Serrated	Plain	Serrated
20x5	750	-	650	-
25x3	750	650	600	550
25x5	1000	850	800	700
32x5	1400	1200	1200	1000
40x5	1700	1600	1600	1500

Recommend Tread			Width
@30o.C.	@40o.c.		Bolt Center Distance
T1-T6	T1-T2	T3-T4	A
125	125	115	45
155	165	155	75
185			75
215	205	195	100
245	245	235	100
275	285	275	150
305	325	315	150

Dimension B in tread with carrier plate detail		
Grating Depth h	Dimension B	H
≤ 32	65	h
>32	>70	h

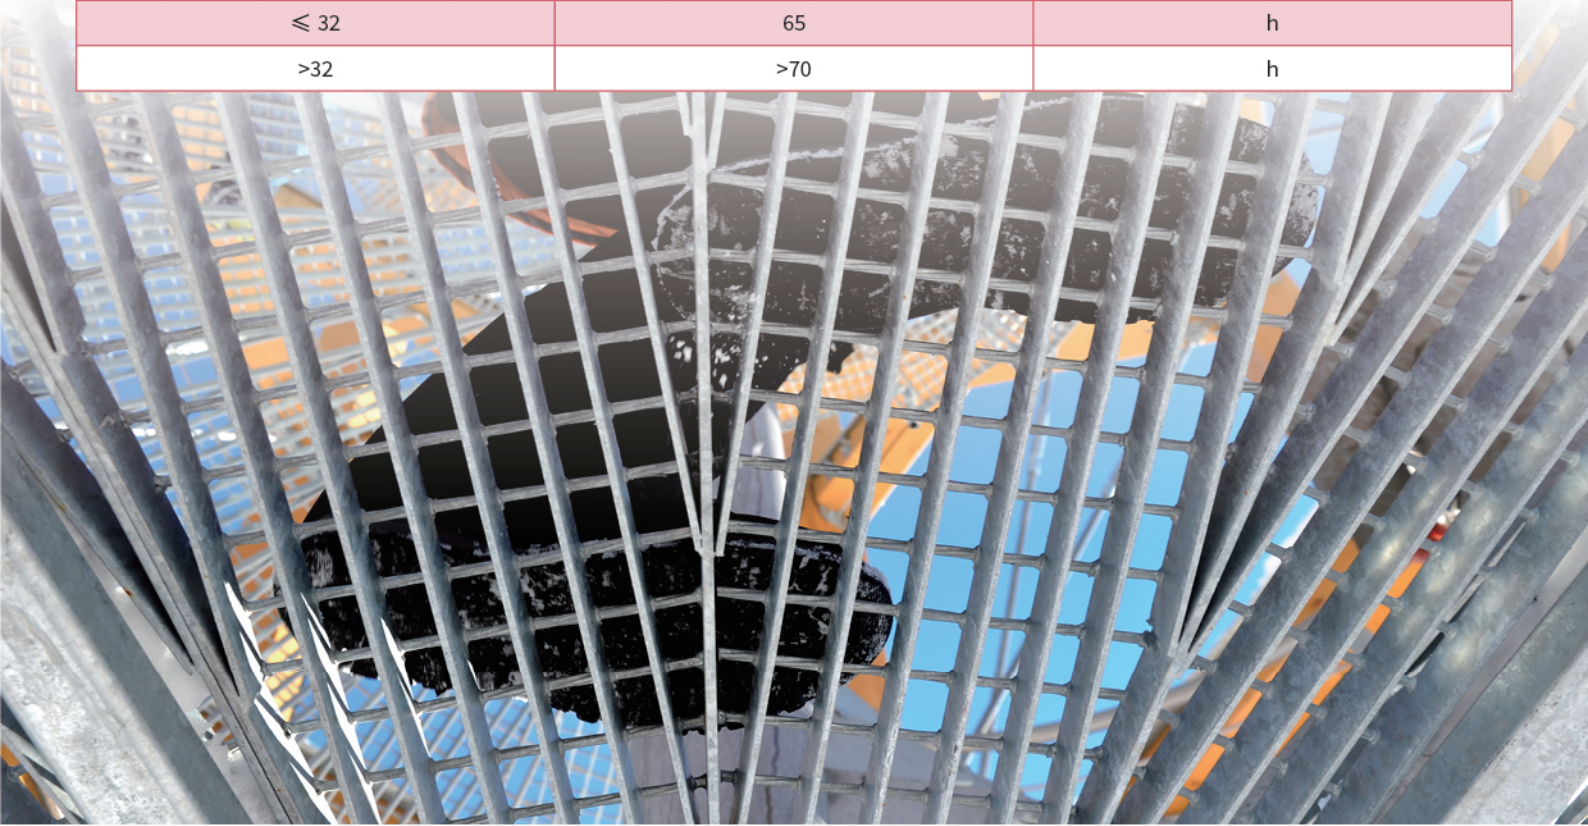

Sino Composite Structures Co.,Ltd.

📱 Mobile: +86-18921275456

📞 WhatsApp: +86-18921275456

✉ Email: sales@sino-grating.com

